


Proximity Tester for Active RFID Tags

TAG CHECKER

Ref. SCIBT60

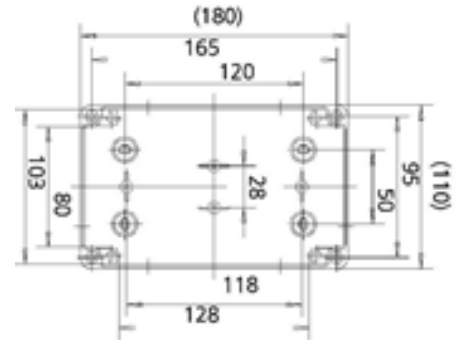

Dimensions

- 🔍 **Tester of active RFID tag's emissions and maintenance signal for battery's Tag low level**
- 🔍 **High Lighting DELs and double tone buzzer**
- 🔍 **Short range settings predefined in factory**
- 🔍 **IP54 Waterproof ABS casing**

Description

The wall-mounted Tag CHECKER detects the tag or the card placed at a short distance from the CHECKER (< 20 cm). This setting is done in factory. The green DEL flashes at the same frequency as the emission's one of the tags and a buzzer is simultaneously activated. The red DEL flashes alternatively with the green DEL when the shown tag has reached the end of its autonomy (battery's Low Level). A buzzer with a different tone is simultaneously activated.

TECHNICAL SPECIFICATIONS

Power supply	230Vac – Internal 12Vdc conversion board with fuse Power supply cable provided
Average Current	20mA@12Vdc
Frequency	433.92 MHz
Detection distance of tags	Factory settings with short range < 20 cm
LED Indicator	Green LED and Buzzer Tone 1: tag's emission OK Red LED and Buzzer Tone 2: low level of tag's battery
Housing	ABS material – 180 x 110 x 90mm – IP54 Waterproof 4 internal holes for wall mounting
Operating temperature	-25°C to +60°C
Standards	EN 301 489 – 3: 2002 V1.4.1; EN 300 220 – 2007: V2.1.2; CE; RoHS Certified