

Blue PUCK ID

Industrial Bluetooth Low Energy beacon BENEFITS



- Very high autonomy : up to 20 years
- Pick-to-light : integrated high power LED
- High transmission range
- Waterproof (IP69K)
- Smart & secure programming by NFC
- Over The Air Programming (OTAP)
- Dynamic Advertising period
- BAF Compatible depending on configuration



OPERATING MODE

Frequency	2,4 GHz - Bluetooth Low Energy 4.0/4.2
Output power	Up to +4 dBm (configurable)
Range	Up to 500 meters in open field (+4dBm)
Transmission period	2 advertising periods can be configured (value between 0,1 and 86400 seconds). Transition from one to another according to configurable sensor threshold
Radio frame format	ELA ID (15 bytes identifier) iBeacon Eddystone <i>Other frame format available on request. Refer to the frames specifications for more information</i>
Parameters and configuration	Interface/protocol NFC (Type 2)
Connected mode	LED indicator (ON/OFF) command / Battery level

BATTERY

Power supply	3 VDC - Internal lithium battery
Battery life	ID (ELA), iBeacon, Eddystone : up to 20 years* <i>* Refer to the battery life curves for more information.</i>
Battery level	Low battery warning in advertising frames (<15%) Battery voltage in scan response frames (configurable)

CERTIFICATIONS

Europe	CE / EN 301 489 & EN 55032 / EN 62368-1
UK	UKCA
USA	FCC : FCC PART 15
Canada	ISED : RSS-247 / ICES-003
Japan	TELEC
RoHs/REACH	Yes


HOUSING

Dimensions	Ø 57 mm base – Thickness : 20 mm
Weight	41g
Materials	DELRIN (POM C) Compatible with food products (90/128/EEC)
Waterproofness	IP 69K & IP68
Shockproof	Yes
Operating temperature	-40°C to +85°C

ACCESSORIES

Tag support	<p>Holder + double-sided adhesive: PUCK HOLDER STICKER (ACIOM118B)</p> <p>Holder only: PUCK HOLDER (ACIOM117B)</p> <p>Double-sided adhesive only: PUCK STICKER (ACIOM188) 3M PT1100 - Ø 55mm – Thickness: 1,1mm</p>
--------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

MECHANICAL DRAWINGS

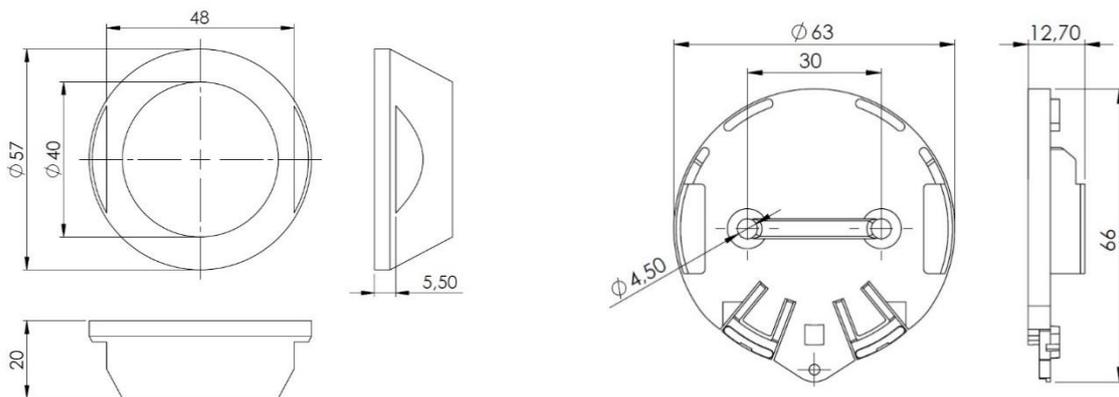

Blue PUCK ID

PUCK HOLDER

AVAILABLE REFERENCES

Ref	Description
IDF25240-01A	Blue PUCK ID extended temperature version & IP69K
IDF25240-02A	Blue PUCK ID Bluetooth advanced features ready version & IP69K
IDF26240-02A	Blue PUCK ID extended temperature & IP69K Geotab ready version